


S2-WL-ST

Accessories

Solis Monitoring System

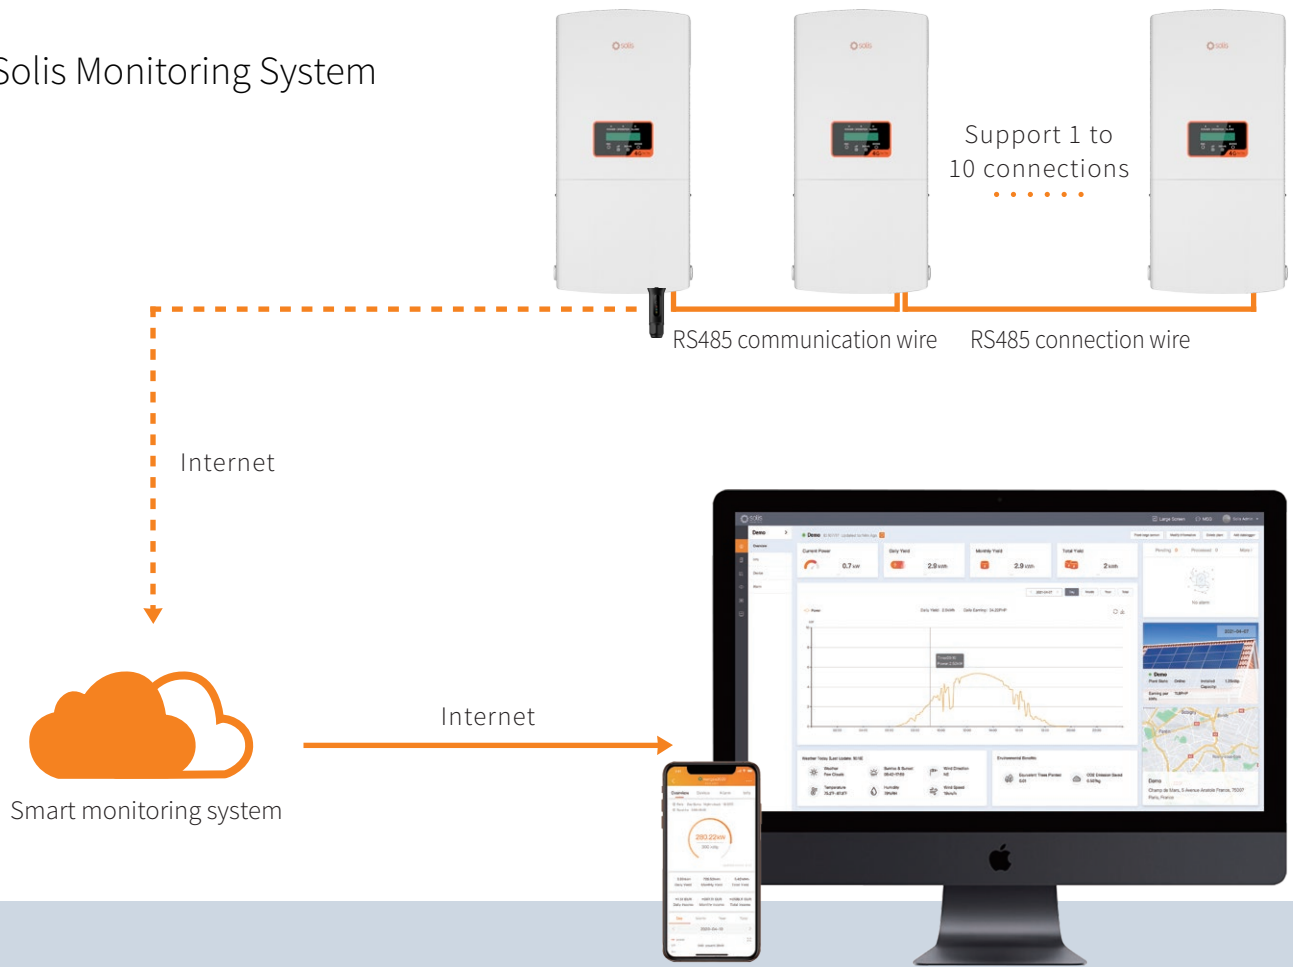

Support 1 to 10 connections

RS485 communication wire RS485 connection wire

Internet

Internet

Smart monitoring system



S2-WL-ST (4 Pin)



S2-WL-ST (USB)

Data Logging Stick: S2-WL-ST

- Support WiFi and LAN communication
- Plug and play, quick installation
- Fault alarm, real-time monitoring
- Status indicator, easy to display working status
- RESET button, one key to send data, convenient debugging
- Support Bluetooth nearby connection and debugging
- One-key assignment of inverter address, efficient and labor-saving

Datasheet

Model Name	S2-WL-ST (4 Pin)	S2-WL-ST (USB)
------------	------------------	----------------

Communication

Supported device type	Solis inverter
Number of connected inverters ⁽¹⁾	≤10
Data collection intervals	5 minutes
Status indicator	LED×3
Communication interface	4 Pin/USB
Wireless communication	802.11b/g/n (2.4G—2.483G)
Configuration method	APP/WEB

Electrical

Operating voltage	DC 5 V (+/-5%)
Operating power consumption	≤5 W

Environment

Operating temperature	-30 ~ +65°C
Operating humidity	5%-95%, Relative humidity, no condensa
Storage temperature	-40 ~ +70°C
Storage humidity	< 40%
Operating altitude	≤4000 m
Protection degree	TYPE 4X

Mechanical

Dimensions (L*W*H)	125*34*49 mm	112*34*49 mm
Installation method	Insert+Screw	Insert+Lock
Weight	103 g	89 g

Others

Certification	CE, FCC
---------------	---------

(1) Connect the inverters by RS485 cables.