S2-WL-ST

Accessories

Solis Monitoring System

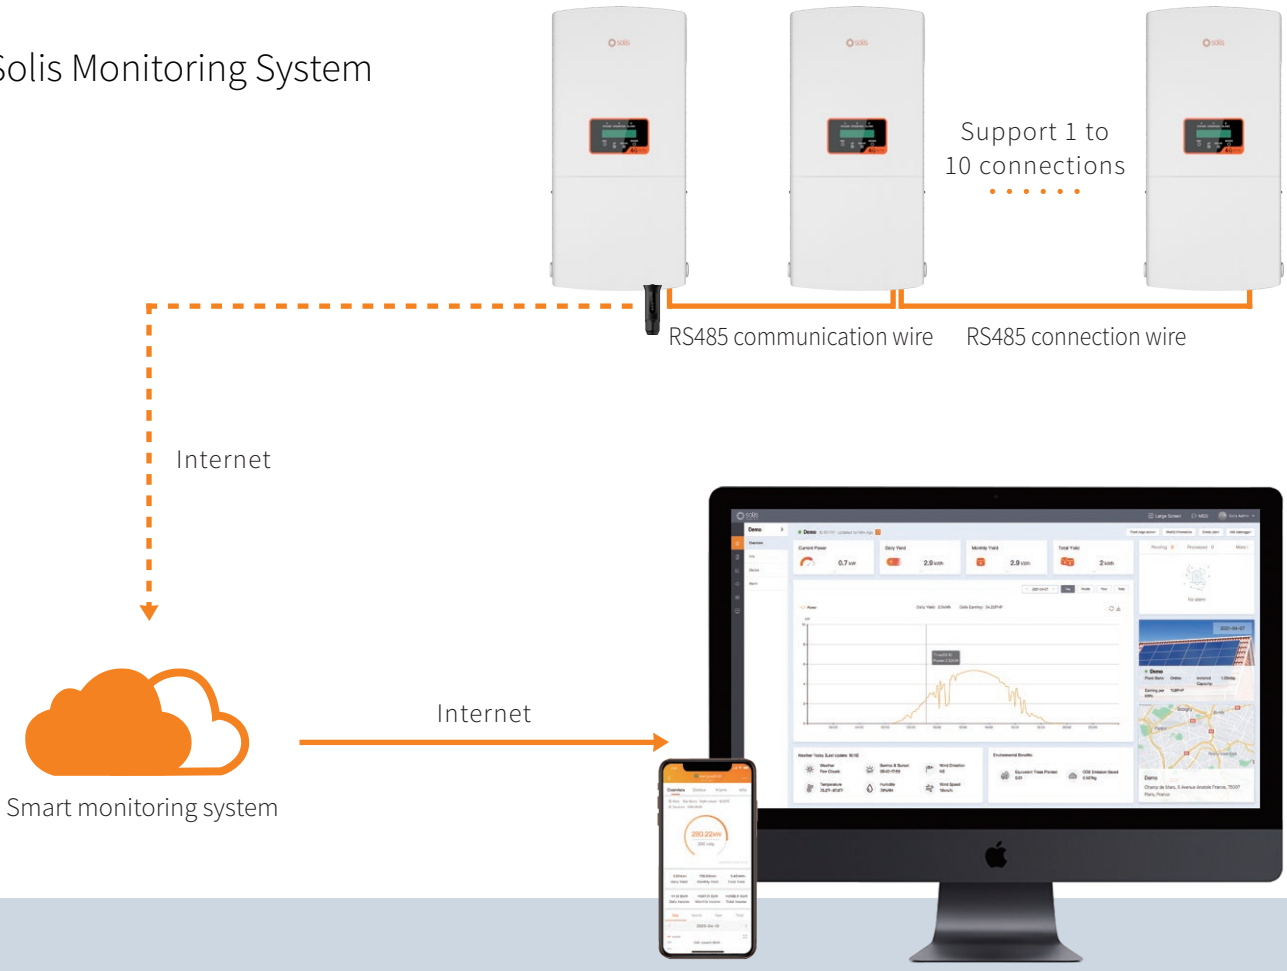

S2-WL-ST (4 Pin)

S2-WL-ST (USB)

Data Logging Stick: S2-WL-ST

- Support WiFi and LAN communication
- Plug and play, quick installation
- Fault alarm, real-time monitoring
- Status indicator, easy to display working status
- RESET button, one key to send data, convenient debugging
- Support Bluetooth nearby connection and debugging
- One-key assignment of inverter address, efficient and labor-saving

Datasheet

Model Name	S2-WL-ST (4 Pin)	S2-WL-ST (USB)
Communication		
Supported device type	Solis inverter	
Number of connected inverters [1]	≤10	
Data collection intervals	5 minutes	
Status indicator	LED×3	
Communication interface	4 Pin	USB
Wireless communication	802.11b/g/n (2.4G—2.483G)	
Configuration method	APP/WEB	
Electrical		
Operating voltage	DC 5 V (+/-5%)	
Operating power consumption	≤5 W	
Environment		
Operating temperature	-30 ~ +65°C	
Operating humidity	5%-95%, Relative humidity, no condensa	
Storage temperature	-40 ~ +70°C	
Storage humidity	< 40%	
Operating altitude	≤4000 m	
Protection degree	TYPE 4X	
Mechanical		
Dimensions (L*W*H)	125*34*49 mm	112*34*49 mm
Installation method	Insert+Screw	Insert+Lock
Weight	103 g	89 g
Others		
Certification	CE, FCC	

(1) Connect the inverters by RS485 cables.