


Accessories

Solis Data Logging Stick

Ginlong Monitoring System



Data Logging Stick

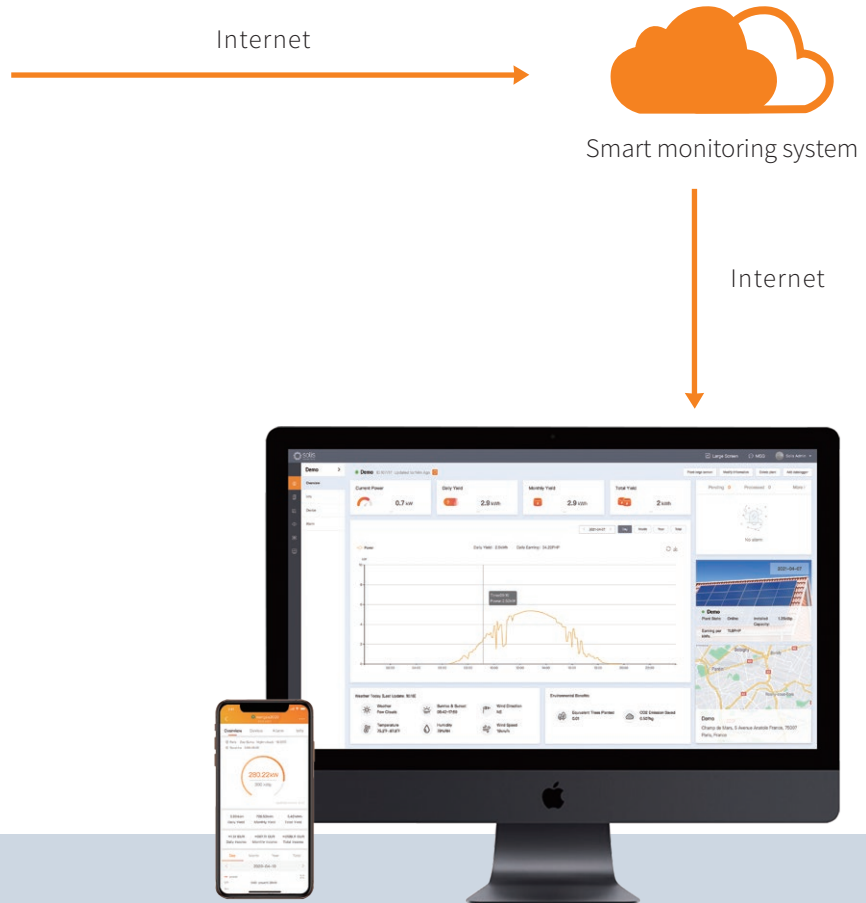

Data Logging Stick
S3-WIFI-ST

WiFi Data Logging Stick

- Plug and play, quick installation
- Fault alarm, real-time monitoring
- Plug and play, convenient and fast
- Status indicator, easy to display working status
- RESET button, one key to send data, convenient debugging

Datasheet

Model Name	S3-WIFI-ST
------------	------------

Communication

Supported device type	Solis inverter
Max. number of connected devices	≤10
Status indicator	3 LEDs
Communication rate	9600 bps (adjustable:1200-115200 bps)
Frequency	2.4 GHz
Data collection intervals	5 minutes (adjustable: 1-15 minutes)
Communication interface	4Pin/RS485
Data storage space	8 MB FLASH

Electrical

Input voltage	DC 5V(+/-5%)
Working current	150 mA~2100 mA
Static power consumption	<2 W
Max. instantaneous power consumption	<10 W
Power consumption	<5 W

Environment

Operating temperature	-30 ~ +65°C
Storage temperature	-40 ~ +70°C
Relative humidity	5%~95%, non-condensing
Storage humidity	< 40%
Operating altitude	4000 m
Protection degree	TYPE 4X

Mechanical

Dimensions (L*W*H)	130*45*45 mm
Installation method	Plug-and-Play
Weight	61 g

Others

Certificates	CE, FCC
--------------	---------